




# GFT614

## 1 to 4 Line 50 Ω Driver Module

### Features

- Up to 150 MHz clock rate
- Drive 100 feet of cable at 150 MHz
- Four (4) synchronized 50 Ω TTL outputs
  - 1 ns typical output rise & fall time
  - Selectable polarity
  - 2 ps input to output RMS jitter
- One input with:
  - Selectable threshold (+1 V / 0 V / -1 V)
  - Selectable load 50 Ω or 1 kΩ pull up
- Active low Gate input
- Operate from DC +5 V
- All input & output are BNC connectors
- Compact module: 115 X 103 x 37 mm
- Option: 4 individual 50 Ω TTL line drivers

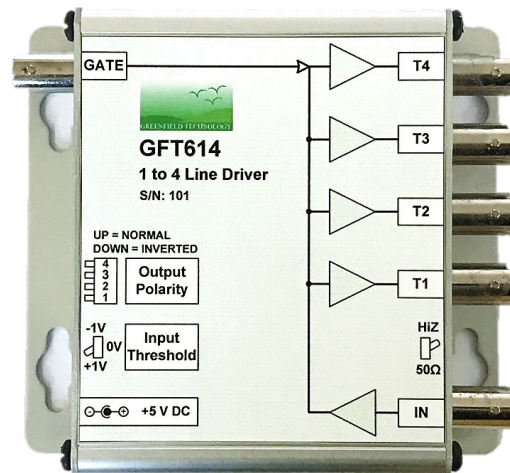

*Top view of the module*

### Description

The GFT614 module is specially designed for distribution of high frequency clock and high-speed logic signal to multiple devices via long cable. All outputs with 50 Ω load can drive 100 feet of cable at clock rate greater than 200 MHz with 2.5 V amplitude.

The channel input threshold can be set to +1 or 0 or -1 V and the input load can be selected from 50 Ω or 1 KΩ pull up by a front panel switch. So that channel input can be driven directly by TTL / CMOS logic levels or open collector or negative pulse (0 to -3 V) or AC coupled signal (± 0.5 V).

All outputs with 50 Ω load can drive 100 feet of cable at clock rate greater than 150 MHz with 2.5 V amplitude. Each output polarity can be set normal or inverted and outputs are compatible with DC or AC TTL input.


A gate input allows to disable the module by external signal.

The GFT614 is a compact module supplied with a +5 V AC/DC adapter.

### Applications

**Typical application** (see below) includes to distribute High speed signal to four devices via long cable (up to 100 feet).

- Clock distribution
- 1 to 4 splitters
- Pulse inverted
- Level translator
- Converting sinewave to square wave
- Long Line Drivers
- Components Test equipment

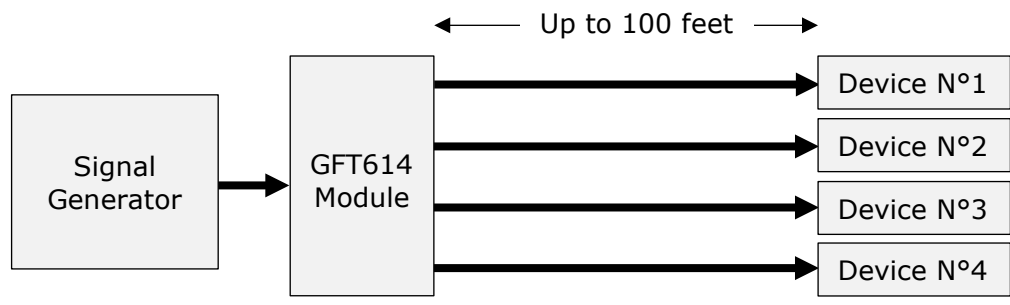

*Typical application*



# GFT614

## 1 to 4 Line 50 $\Omega$ Driver Module


### Specifications

<b>Input</b>	
Range	+5 V to -5 V
Threshold level	+1 V or 0 V or -1 V (selectable at rear panel)
Internal load	50 $\Omega$ or 1 k $\Omega$ pulled to +5 V (selectable at front panel)
Minimum pulse width	5 ns
<b>Output</b>	
Number	4
Output resistance	50 $\Omega$
Low level	0.25 V
High level	2.5 V @ Load=50 $\Omega$ , 4 V @ Load > 10 k $\Omega$
Polarity from input	Normal or inverted
Rise /fall times	1 ns / 1 ns @ 100 MHz square wave
Jitter RMS	2 ps (input to output)
Max clock frequency	150 MHz @ cable length = 3 feet
	150 MHz @ cable length = 100 feet
Skew	500 ps (TBC)
<b>Gate</b>	
Low Level	< 0.5 V
High level	2.4 V
Rate	50 MHz
<b>General specifications</b>	
Control	Switches to select: <ul style="list-style-type: none"> <li>- Input load</li> <li>- Input threshold level</li> <li>- Output polarity: normal or inverted</li> </ul> Power on indicator
Inputs & outputs	All are BNC connectors
Size	W = 115, L = 103, H = 30 mm
Mounting flange	included
Power V/A	+5 V / 200 mA max. External AC (90 -240 V) to DC (+ 5 V) adapter furnished
Power connector	Jack 2.10 mm
<b>Option:</b>	
GFT644 module	4 individual 50 $\Omega$ TTL line drivers

### Operating information

#### Block diagram

The 4-channel line driver Includes following function: A level detector, a splitter and one driver per channel

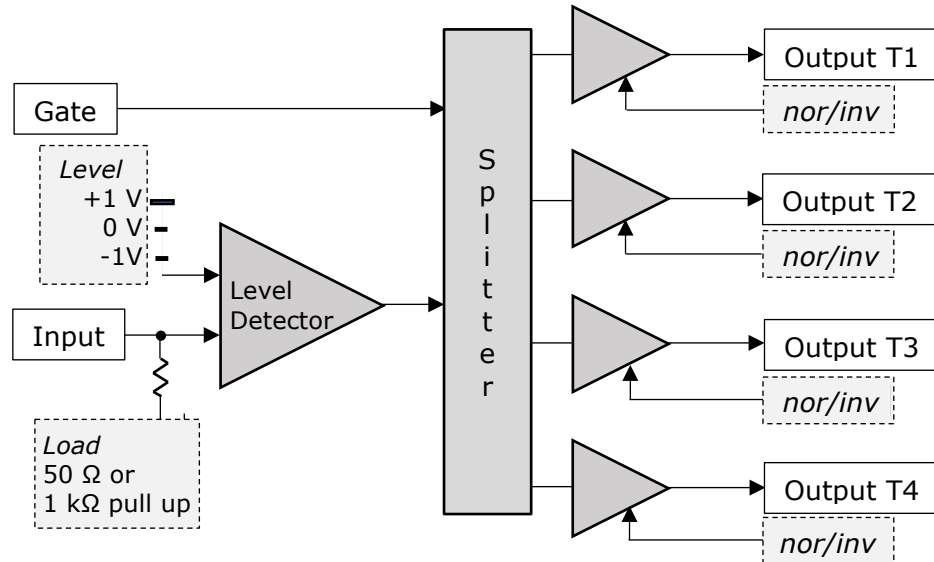

*Block diagram*

#### Level Detector

This function is specially designed to detect the rising and the falling edge of the input signal at precise threshold value. Threshold can be selected to +1 or -1 or 0 Volts using a three-position switch. The 0 volt threshold setting is intended for signal with zero crossing such as sinewave or AC coupled square wave signal.

Input internal load can be selected to 50 Ω or 1 kΩ pulled at +5 V so that it can be driven directly by open collector.

#### Splitter

A high-speed digital splitter with low jitter distributes the calibrated pulse to 4 drivers.

#### Gate


Gate signal allows to quickly inhibit all outputs.

#### Driver


High speed Driver with serial 50 Ω terminated output allows to drive line with or without 50 Ω external load. With 50 Ω load you may drive up to 100 feet of cable.

Normal/inverted switch provides output logic polarity selection independently on each channel.


#### Examples of input output mode

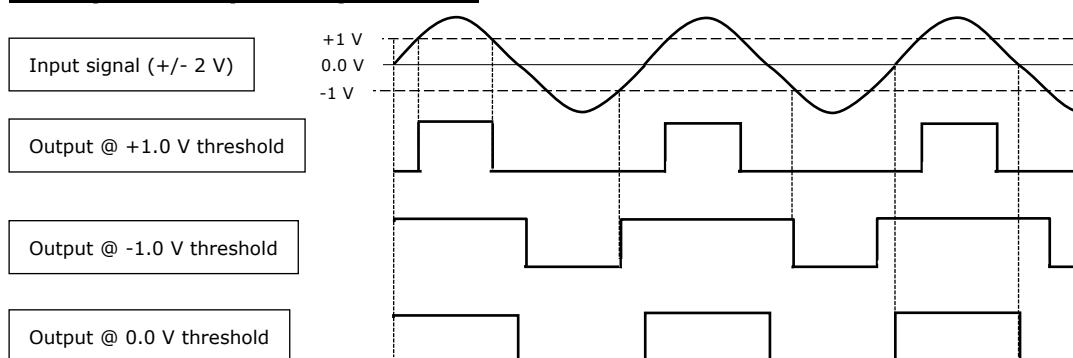

### Input & Output

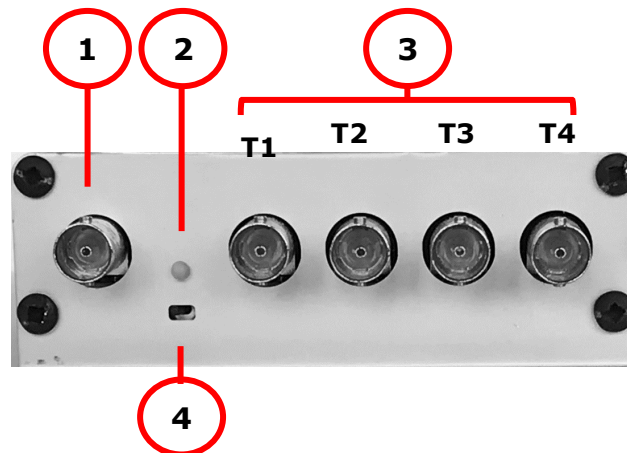

*Front panel*

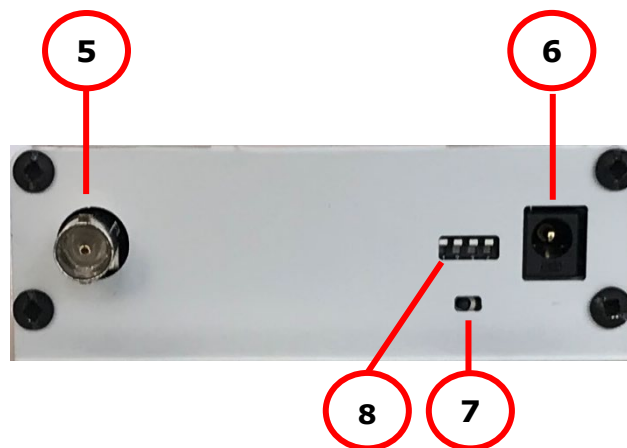

*Rear panel*

### Connector, indicator and switch

Front panel		Rear panel	
	• Indicator		• Connector
2	Light green when power on	5	Gate input: BNC connector
	• Connector	6	Power input: Jack 2.10 connector
1	Signal Input: BNC connector		• Switch
3	T1 Signal output: BNC connector	7	To select input threshold
	T2 Signal Output: BNC connector	8	To select normal/inverted outputs
	T3 Signal Output: BNC connector		
	T4 Signal Output: BNC connector		
	• Switch		
4	To select 50 $\Omega$ or high input impedance		

### Pulse shaping modules

Model	Description
GFT101	Electrical-to-optical Pulse Converter
GFT632	32 - 70 V, <2 ns rise time under into 50 $\Omega$ , Pulse Generator
GFT300	Sub nanosecond Pulse Stretcher from pick up diode to provide clock reference